

Hose Flotation Wrap



Application

Specifically designed for industrial hose strings (boat loading hose) for all applications in the offshore rig supply field.

Technical



Branding	TECHFLUID
Materials	Durable marine grade high visibility polyester with integrated reflective tape delivering visibility in low light conditions
Supply Fixing	Heavy-duty nylon strapping with Delrin buckle
Colour	Fluorescent orange (Other colours available on request)
Resistance	Seawater, Oil, Chemicals, Sunlight, Ozone and Mildew

Advantages

- ✓ Reliable solution design with a high level of buoyancy
- ✓ Quick attach/detach jacket style design for hose sizes
- ✓ Stress reduction to the hose when loading fluids increasing hose life
- ✓ Reduces the hazard of hose fouling on supply boat propeller and rudder
- ✓ Buoyancy, supporting the hose on the surface of the water
- ✓ Fluorescent wrap increases visibility and low light operations for fluid transfer safety

For more information please consult with Techfluid's technical support team
Tel +44 (0) 1670 704 720

Flotation Wrap

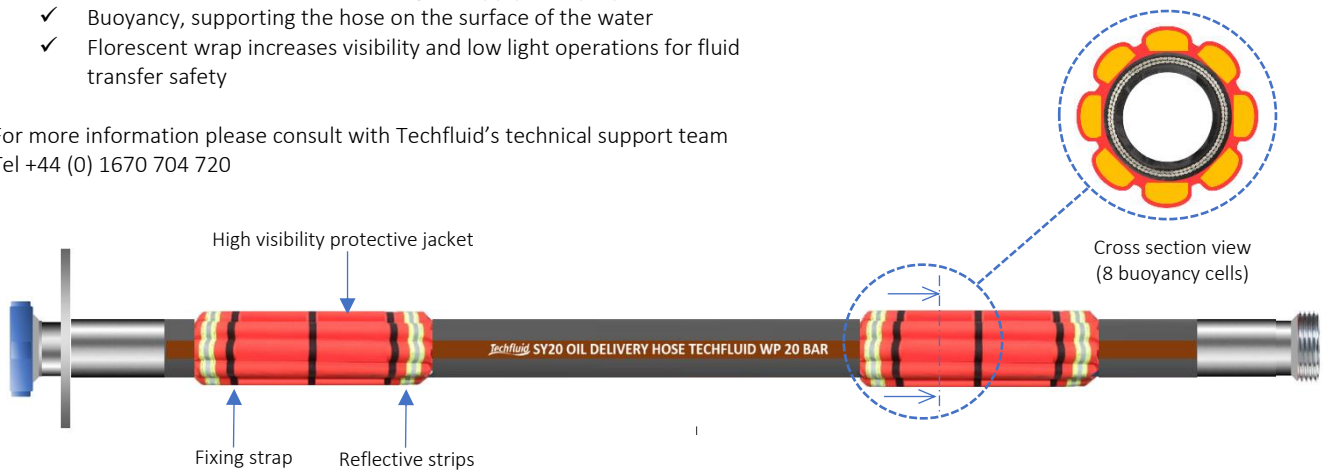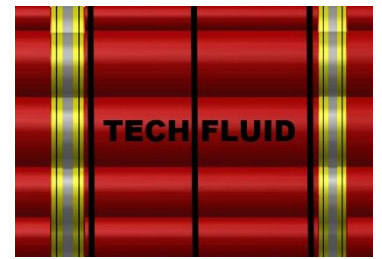

Type	Size	Hose OD (Minimum)	Hose OD (Maximum)	Buoyancy Cells (Number)	Flotation wrap dimensions (approx. size)		Net buoyancy of float	Weight
					(Length)	(Width)		
HFW32	2"	2.75	3.50	6	26	22	36	2.50
HFW32	3"	3.75	4.50	7	27	25	38	2.75
HFW32	4"	4.75	5.50	8	31	28	40	3.00
HFW32	5"	5.75	6.50	9	31	31	68	5.00
HFW32	6"	6.75	7.25	10	36	34	75	5.75
HFW32	8"	8.50	9.50	12	36	40	90	6.50